



TITAN DOOR SYSTEMS

Opening Doorways for Australia



CLEARFOLD
DOORS

CLEARFOLD DOORS

Smart - Stylish - Strong

Innovation and excellence remain at the core as smart design technology renovates and energises these tracks.

Eliminating the need for a floor track as it glides smoothly along an overhead track tucked neatly in the ceiling.

Tailor made for individual needs, both functional and stylistic, it is not just a chic and trendy addition to the space but also brings new opportunities, making additional floor space available to serve other purposes.

As the entrance glides open, onlookers are immediately drawn to the tasteful sparsity of limiting structure, bringing an approach that takes the benefits of an open floor plan and combines it with the largest technology to heighten visitor's experiences.



Features

- The Clearfold stacking door is designed to enable vision of your merchandise whilst providing security and smooth effortless operation for large openings
- Doors are made of a balanced number of panels, with customisation options to meet your building's needs.
- Operation via lead post provides simple, effective functioning, with both stacking and unstacking seamless.
- Streamlined wall of windows gives tasteful, minimalist, enticing visual appeal. Supported by strenuous security capability.
- Space saving structure allows the stack bay to encompass minimal room while offering efficient structure for panels in compact folds.
- Stack bay enclosure is required to remain 20mm from the track line for effective lock cylinder function.




Standard
Specifications
Maximum Height
3.5m

Specifications

- Track - Two part extruded aluminium 100mm high x 68mm profile. Tracks can be curved to provide smooth operation and accommodate irregular apertures.
- Curtain - The curtain is constructed from a three part extruded continuous aluminium hinge joined to 100mm top and bottom rails. A mid rail can be fitted and is recommended for openings over 2000mm high. Standard glazing of 6.38 mm laminated glass is fitted between the aluminium panels and secured with specially designed co-extrusions glazing wedges. Opening width is divided into an even number of panels. Panel widths are fabricated to suit each individual opening.
- Stack Bay - Purpose fabricated to each job the bifurcated track allows the panels to be slid along the track locus and stack neatly into the stack bay. The fact that the panels can only bi-fold at the stack bay allows the door to travel in close proximity to obstructions without hampering door operation.
- Locking - Locking up and down is provided at curtain ends and locking to floor is provided on consecutive hinges.
- Finish - The clearfold door can be supplied in any powdercoat or anodized finish.

Applications
Suitable for many commercial applications including: Shopping Centres, Bar Tops, Counter Tops, Shopfronts, Doorways, Bottle Shops, Sports Complexes, Arcades, Clubs.

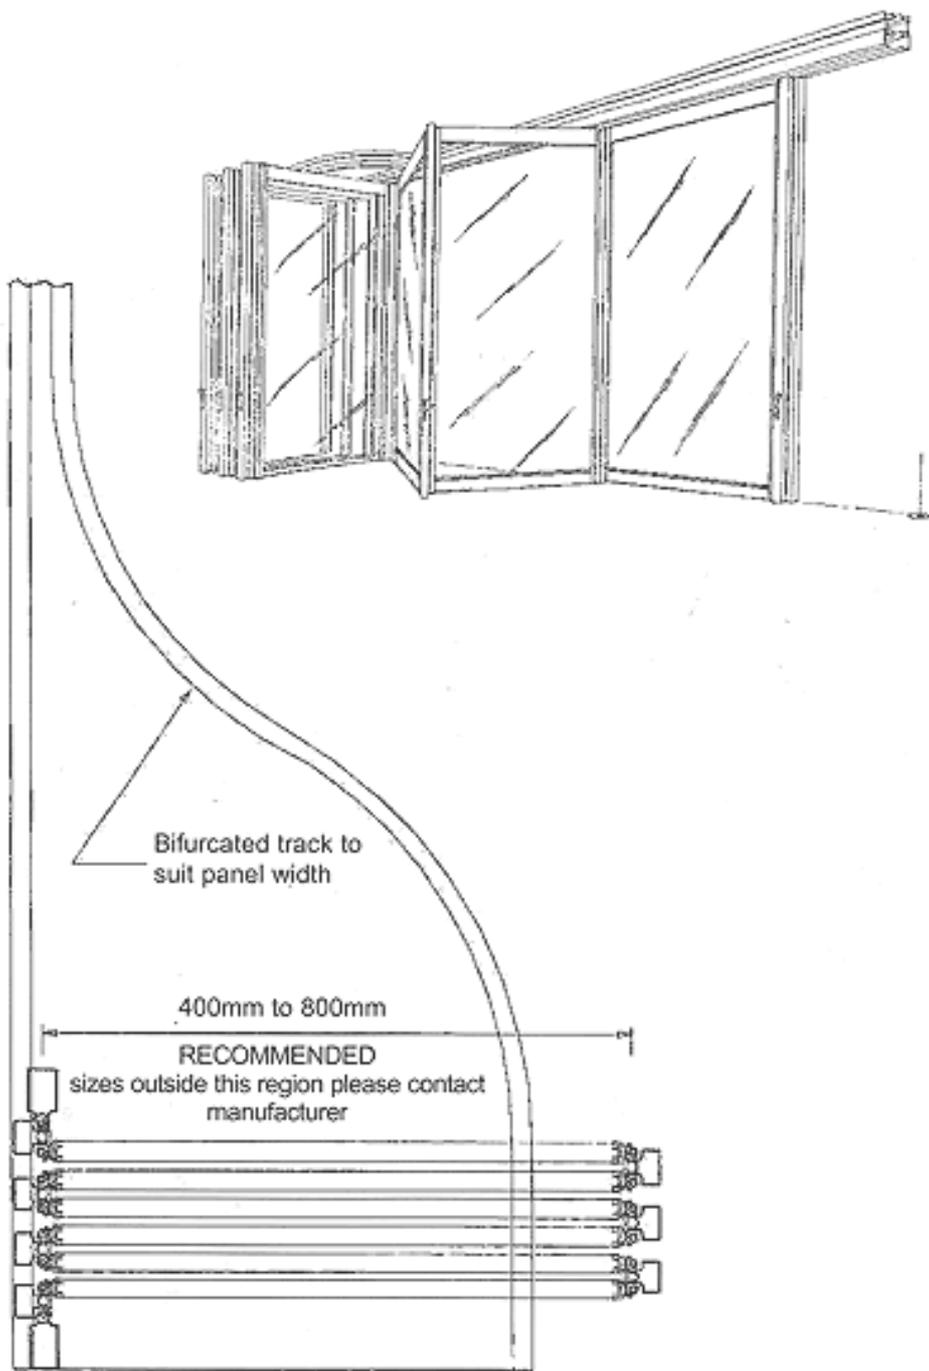

CLEARFOLD DOOR

Technical Drawing

Contact Us

-  PO Box 828, Moonee Ponds 3039
-  info@TITANdoorsystems.com.au
-  Phone: (03) 9034 6047

Visit our website for full range
 www.titanddoorsystems.com.au