



TITAN DOOR SYSTEMS

Opening Doorways for Australia



TIMBER
ROLLER
DOORS

TIMBER ROLLER DOORS

Aesthetic - Versatile - Secured

Made from premium Tasmanian Oak Timber, Timber Roller Doors are perfect example of aesthetics and functionality. The untreated finish makes it easier to blend in with the interior/exterior of your commercial or personal space. The timber slats of the shutter are made to have self-mating edge profiles to ensure that shutters roll seamlessly while also providing a continuous timber appearance.

We offer two options when it comes to side guides - aluminum and timber, so that you can select one that best suits your requirements. We also offer aluminum and timber mullion options to match the make of the doors you select for your installation.

Talking about security, timber roller shutters can feature either a two-way motorized key lock or the standard sliding shoot bolts. The timber shutters are available in polished and/or stained finish or untreated.

Applications

As the Timber Roller Shutters lay a major emphasis on aesthetics, they are an ideal choice for installations such as

- Doorways
- Counter Tops
- Bar Tops
- Reception Desks and more.

We offer the doors in multiple sizes and a host of customization options to match your requirements.





SPECIFICATIONS

- Curtain - Machined timber slats with a face depth of 38mm x 16mm thick with specially designed self mating edge profiles to allow rolling and provide a continuous timber appearance.
- Side Guides - 50mm x 40mm marching timber with 20mm x 20mm rebate for curtain travel or 37mm x 25mm extruded aluminium with schlegal nylofelt buffer for noise reduction and curtain protection.
- Locking - Two way mortise key lock or sliding shoot bolts.
- Bottom Rail - 75mm x 16mm timber profile designed to mate with slats fitted with 65mm x 5mm timber cover plate to conceal lock and locking bars. A 40mm x 12mm full radius timber profile is fitted to base to form a "Tee".
- Brackets - Manufactured from 90mm x 40mm mild steel.
- Roller Drum - Manufactured from 165mm or 229mm spiral ducted tube attached to self lubrication drum wheels and bearing rotating on a 34mm steel shaft. The shaft shall be fitted with helical springs designed to counterbalance the curtain throughout its operation. The drum shall be designed to give minimum deflection over the span.
- Mullions - Either two piece aluminium or machined timber to match curtain designed specifically to suit the installation.
- Sliding - Manual sliding operation available depending on size and path complexity.
- Finish - Stained and/or polished or untreated.

Standard Specifications

Opening Size

2400mm wide x
2400mm high

Operation


Designed for manual operation or motorised.

Features


- Custom-made from Tasmanian Oak timber in untreated finish so it can be stained and matched to adjacent timbers.
- Doors are supplied with either timber or aluminium side guides to suit specific requirements.

Bundle Diameters for Timber Roller Shutters

| Drop | 150mm | 229mm |
|------|-------|-------|
| 900 | 230 | 275 |
| 1200 | 245 | 295 |
| 1500 | 260 | 295 |
| 1800 | 260 | 315 |
| 2100 | 275 | 330 |
| 2200 | 290 | 330 |

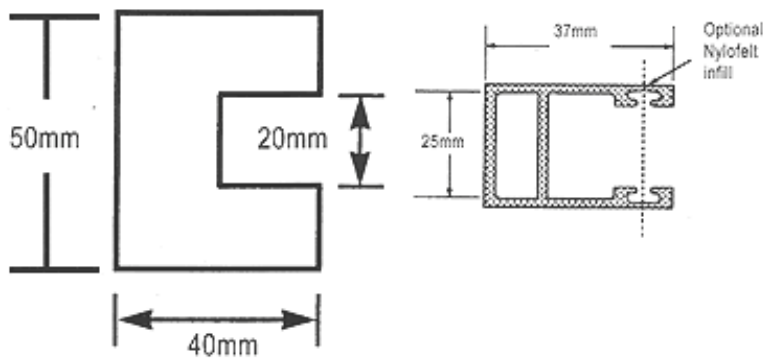

Timber Roller Nylofelt Infill

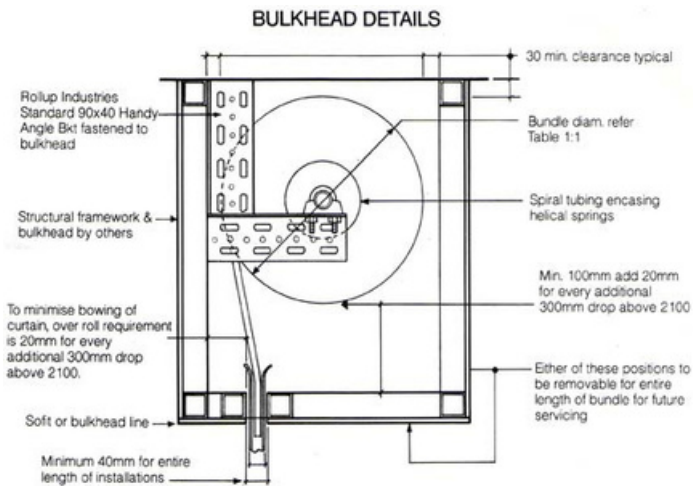

Timber Roller Bulkhead Details

Contact Us



PO Box 828, Moonee Ponds 3039



info@TITANdoorsystems.com.au



Phone: (03) 9034 6047

Visit our website for full range



www.titanddoorsystems.com.au

TIMBER ROLLER DOORS